

LOW-LEVEL ACCESS

LMY25

Push Around

Vertical Mast



STANDARD FEATURES

- 2.5m platform height, 4.5 m working height;
- 250 kg safe working load (1 person)
- Compact-only 0.75m wide, passes easily through standard doorways;
- Large 1.0 m x 0.75 m platform size
- Only 1.2m x 0.75 m working footprint
- Easy access gate
- 12V DC power source
- Low voltage battery protection
- Battery level indicator
- Maintenance free batteries
- Audible ascent and descent drive alarm
- Easy to deploy, safer to use
- Safer Alternative to Ladders and Steps

Safety features

- Fail-safe hydraulic circuit complete with check valve on lift cylinder
- Emergency descent from ground level
- Lifting automatic brake
- The platform automatically closes the door

Push Around

Indoor Use

IMPORTANT

We are continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.



Email: sales@cqliften.com


<https://www.cqliften.com>

WhatsApp: +86 13736163658

LOW-LEVEL ACCESS

OPERATING DIMENSIONS

Maximum working height:	4.50 m
Maximum platform height:	2.50 m
Platform dimensions:	1.0 m x 0.75 m
Working foot print:	1.20 m x 0.75
Safe working load:	200 kg (1 person plus tools)
Maximum manual force:	200N
Maximum gradient for operation:	0.5 degrees
Maximum wind force:	Internal use only 0 m/s
Maximum castor point load:	215 kg (2.1kN)
Power Sound Level:	less than 70dBa
Length:	1.20 m
Width:	0.75 m
Height:	1.60m
Weight	310kg

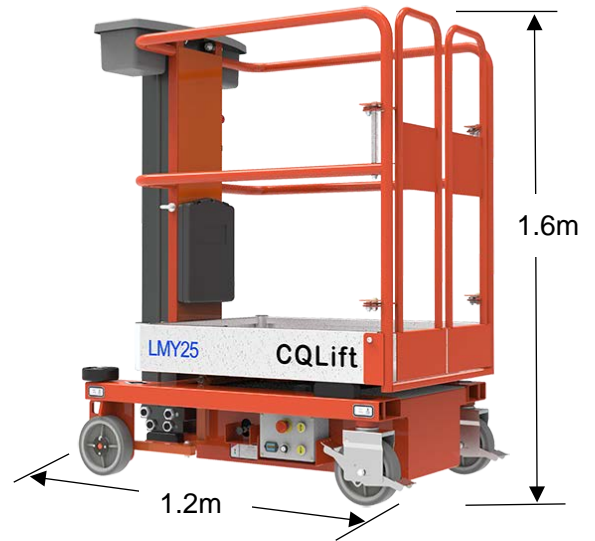

POWER OPTIONS

Battery: 12V c/w automatic charger.

Mains: 110V or 230V.

Controls: Simple push button basket controls.

Construction: Heavy duty fabricated steel superstructure, stainless steel bushed pivots, tough powder coated finish.

Safety: CE marked, complies with applicable European legislation including the Machinery Directive using the EN280 design standard. Full fail-safe hydraulics, automatic locking wheels.

Options


Tilt alarm c/w auto cut-out.

Narrow basket for suspended ceiling grid access.

Pipe Carrying kit (max 2" pipe).

Tool tray.

Foam buffer kit.

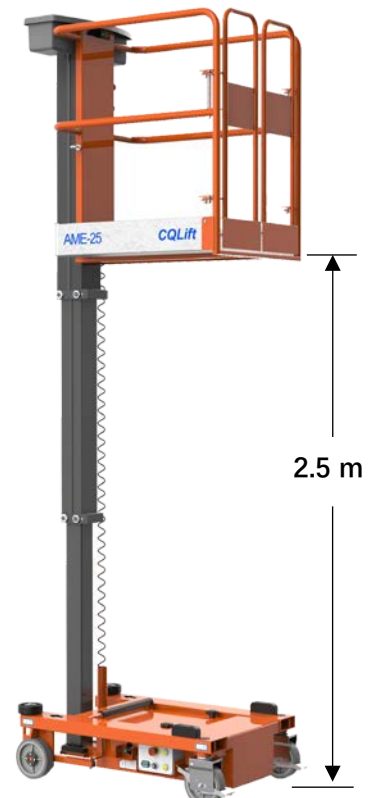

IMPORTANT

We are continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight.

Specifications may change to meet country standards or with the addition of optional equipment.



Email: sales@cqliften.com

<https://www.cqliften.com>

WhatsApp: +86 13736163658