

## LOW-LEVEL ACCESS

# LPT03A

## Electric Boom

simply reliable



---

### STANDARD FEATURES

- 3.0m platform height, 5.0 m working height
- 250 kg safe working load (1 person)
- Compact - only 0.78 m wide, passes easily through standard doorways
- Large 1.52 m x 0.75 m platform size
- Only 0.78 x 1.6 m working footprint
- Easy access gate
- 12V DC power source
- Low voltage battery protection
- Battery level indicator
- Maintenance free batteries
- Audible ascent and descent drive alarm

### PUSH AROUND

Indoor use

Working Height: 5.0m

Typical applications and users: For users who want larger platform size for themselves, tools and equipment.

Typically dry-lining, pipe and duct work, air-conditioning, general M & E contractors, shopfitters, retail refit etc.

---

### Safety features


- Fail-safe hydraulic circuit complete with check valve on lift cylinder
- Improved heavy-duty Auto-Lok wheels on elevation provide secure base
- Emergency descent from ground level

**CQLift**

<http://www.cqliften.com/>

## OPERATING DIMENSIONS

Maximum working height:	5.00 m
Maximum platform height:	3.00 m
Platform dimensions:	1.52 m x 0.75 m
Working foot print:	1.60 m x 0.78
Safe working load:	250 kg (1 person plus tools)
Maximum manual force:	200N
Maximum gradient for operation:	0.5 degrees
Maximum wind force:	Internal use only 0 m/s
Maximum_ castor point load:	215 kg (2.1kN)
Power Sound Level:	less then 70dBa
Length:	1.60 m
Width:	0.78 m
Height:	342 kg

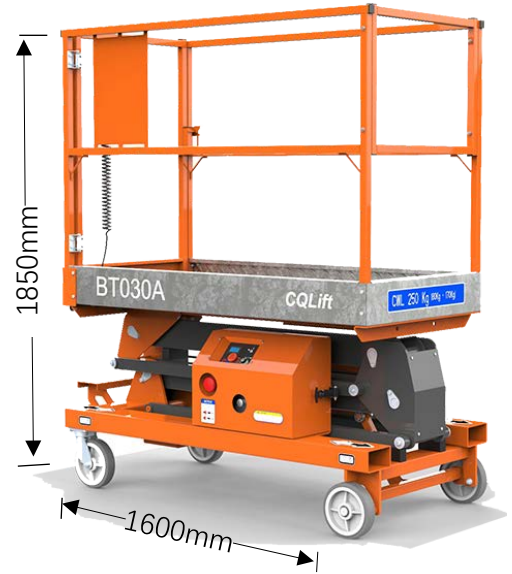

## POWER OPTIONS

Battery: 12V c/w automatic charger.

Mains: 110V or 230V.

Controls: Simple push button basket controls.

Construction: Heavy duty fabricated steel superstructure, stainless steel bushed pivots, tough powder coated finish.

### Safety:

CE marked, complies with applicable European legislation including the Machinery Directive using the EN280 design standard.

Full fail-safe hydraulics.

Automatic locking wheels.

### Options:

Tilt alarm c/w auto cut-out.

Narrow basket for suspended ceiling grid access.

Pipe Carrying kit (max 2" pipe).

Tool tray.

Foam buffer kit.



## IMPORTANT

We are continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.

# CQLift

Ningbo Chuangqi Machinery Equipment Co., Ltd.

Email:sales@cqliften.com

<https://www.cqliften.com>

Whatsapp:+86 13736163658